

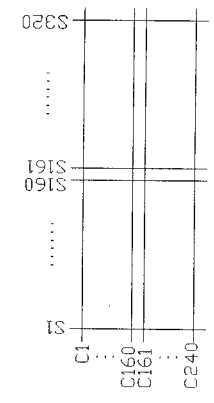


Terminal No.	Pin Name
1	VSS
2	VDD
3	V0
4	/MR
5	/RD
6	/CS
7	RS
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	BUSY
18	VOUT
19	BLA
20	BLK




Wiring Details (Top View)
Scale=free

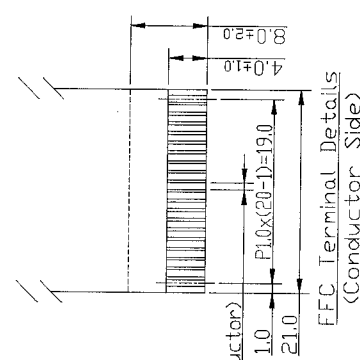

FFC Terminal Details
(Conductor Side)
Scale=2/1

- Note:
- *1. Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 9H
 - *3. Duty : 1/240, Bias : 1/12
 - *4. Backlight Color : White
 - *5. Operating Voltage : 3.0V
 - *6. Operating Temperature : -10°C~60°C
 - *7. Storage Temperature : -20°C~70°C
 - *8. Driver IC : RA8803 or Equivalent
 - *9. An external VR(25K to 50K) must be connected for Contrast Control
 - *10. Environmental Safe Standard : RoHS

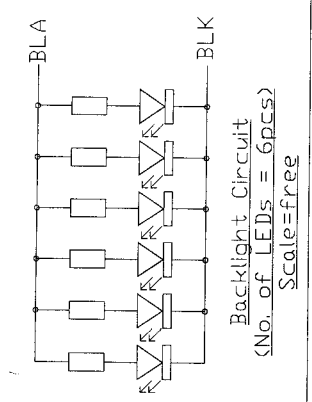

C				
B				
A	- Revise Outline	Li Shuai	2006-05-18	
Rev Note				
Dwg Title	BTG-322405G			
Dwg No.	MK-001241a-1-1	Note	2006-04-18	
Scale	1/2	Unit	mm	Sheet
Approved	Li Shuai	Checked	Li Shuai	

BeyondTek, Inc.