

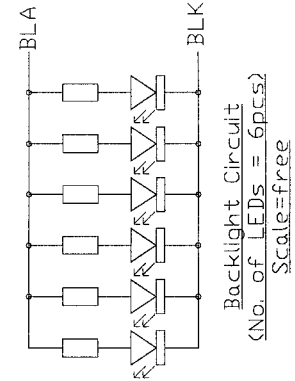


- Note:
- *1. Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 9H
 - *3. Duty : 1/240, Bias : 1/12
 - *4. Backlight Color : White
 - *5. Operating Voltage : 3.3V
 - *6. Operating Temperature : -10°C~60°C
 - *7. Storage Temperature : -20°C~70°C
 - *8. An external VR(25K to 50K) must be connected for Contrast Control
 - *9. Environmental Safe Standard : RoHS

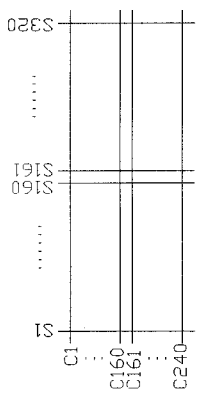

Terminal No.	Pin Name
1	VOUT
2	V0
3	NC
4	VDD
5	VSS
6	D0
7	D1
8	D2
9	D3
10	/DISPFF
11	LP
12	M
13	CP
14	FLM
15	BLA
16	BLK



C					
B					
A	- Revise	Dimension			
Rev/Note					
Dwg title					
Dwg No.		MK-001435a-1-1	Date	2006-10-11	
Scale		3/2	Unit	mm	
Approved			Checked		
Drawn			Checked		
Lin Yan			Checked		
Date			Checked		
2006-10-12			Checked		
BTG-322455G-WT9SLW			Checked		
Paper Size		A3	Checked		
Lin Yan			Checked		

BeyondTek, Inc.